

Product Summary


V_{DS} (V)	$R_{DS(on),max}$ (mΩ)	$R_{DS(on),typ}$ (mΩ)	I_D (A)
100	5.3 @ $V_{GS} = 10V$	4.8 @ $V_{GS} = 10V$	135 ⁽¹⁾

Features



- Low $R_{DS(on)}$ SGT technology
- Low thermal impedance
- Fast switching speed
- 100% avalanche tested

Application

- DC/DC conversion
- Power switch
- Motor drives



Equivalent circuit



TO-220

NOTE:
 LOGO - GS
 GMXXXX- Part number code
 F - Fab location code
 A - Assembly location code
 Y - Year code
 WW - Week code
 L&T - Assembly lot code

Absolute maximum rating@25°C

Parameter	Symbol	Limit	Unit
Drain-source voltage	V_{DS}	100	V
Gate-source voltage	V_{GS}	±20	
Continuous drain current	I_D	135	A
		90	
		18	
Pulsed drain current ⁽²⁾	$I_{D,pulse}$	480	
Avalanche energy, single pulse ⁽³⁾	E_{AS}	150	mJ
Power dissipation	P_D	156	W
		3.1	
Operating junction and storage temperature range	T_J, T_{stg}	-55 to 150	°C

Thermal Characteristic

Parameter	Symbol	Max.	Unit
Thermal resistance, junction-to-case	$R_{\theta JC}$	0.8	°C/W
Thermal resistance, junction-to-ambient ⁽⁴⁾	$R_{\theta JA}$	40	

Electrical Characteristics (T_J=25°C unless otherwise noted)

Parameter	Symbol	Test conditions	Min.	Typ.	Max.	Unit
Static parameter						
Drain to source breakdown voltage	V _{(BR)DSS}	V _{GS} = 0, I _D = 250 μA	100			V
Gate-source threshold voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250 μA	2.2	3	3.8	V
Gate-body leakage	I _{GSS}	V _{DS} = 0 V, V _{GS} = ±20 V			±100	nA
Zero gate voltage drain current	I _{DSS}	V _{DS} = 100 V, V _{GS} = 0 V			1	μA
Drain-source on-resistance	R _{DS(on)}	V _{GS} = 10 V, I _D = 50 A		4.8	5.3	mΩ
Forward transconductance ⁽⁵⁾	g _{fs}	V _{DS} = 5 V, I _D = 50 A		90		S
Gate resistance	R _g	f = 1 MHz		1.5		Ω
Dynamic ⁽⁵⁾						
Total gate charge	Q _g	V _{DS} = 50 V, I _D = 50 A, V _{GS} = 10 V		69		nC
Gate-source charge	Q _{gs}			22		
Gate-drain charge	Q _{gd}			17		
Turn-on delay time	t _{d(on)}	V _{DS} = 50 V, I _D = 50 A, V _{GS} = 10 V, R _{GEN} = 6 Ω		53		ns
Rise time	t _r			88		
Turn-off delay time	t _{d(off)}			85		
Fall time	t _f			22		
Input capacitance	C _{iss}	V _{DS} = 50 V, V _{GS} = 0 V, f = 1 MHz		4646		pF
Output capacitance	C _{oss}			580		
Reverse transfer capacitance	C _{rss}			30		
Reverse Diode Characteristics ⁽⁵⁾						
Diode forward voltage	V _{SD}	V _{GS} = 0 V, I _F = 50 A		0.9	1.2	V
Reverse recovery time	t _{rr}	V _{DS} = 50 V, I _F = 50 A, di/dt = 100 A/μs		72		ns
Reverse recovery charge	Q _{rr}			138		nC

Notes

- (1) Package limited.
- (2) Pulse width limited by maximum junction temperature.
- (3) V_{DS} = 50 V, V_{GS} = 10 V, L = 0.3 mH.
- (4) R_{θJA} is determined with the device mounted on a 1 in² pad 2 oz copper pad on a 1.5x1.5 in. board of FR-4 material.
- (5) Guaranteed by design, not subject to production testing.

Typical Performance Characteristics

Fig.1 Typ. transfer characteristics

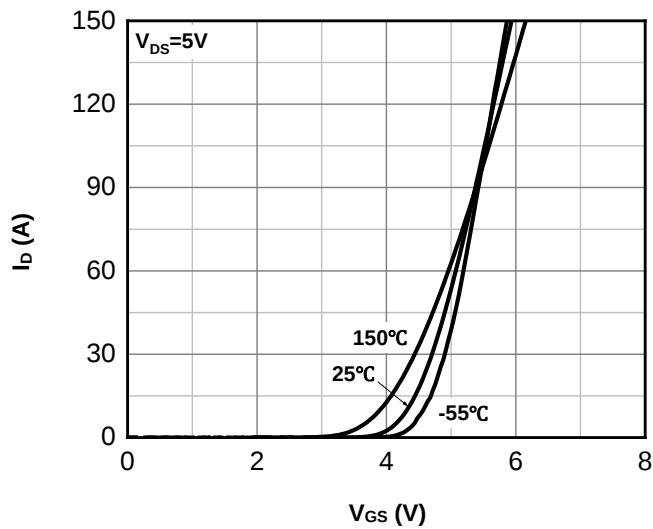


Fig.2 Typ. output characteristics

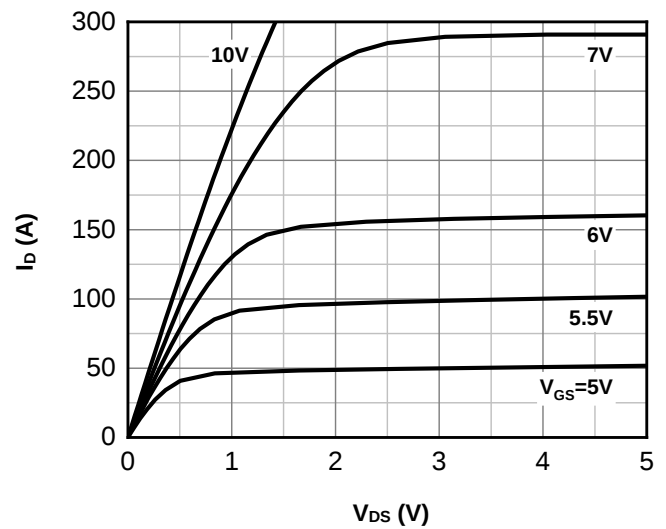


Fig.3 Normalized on-resistance vs drain current

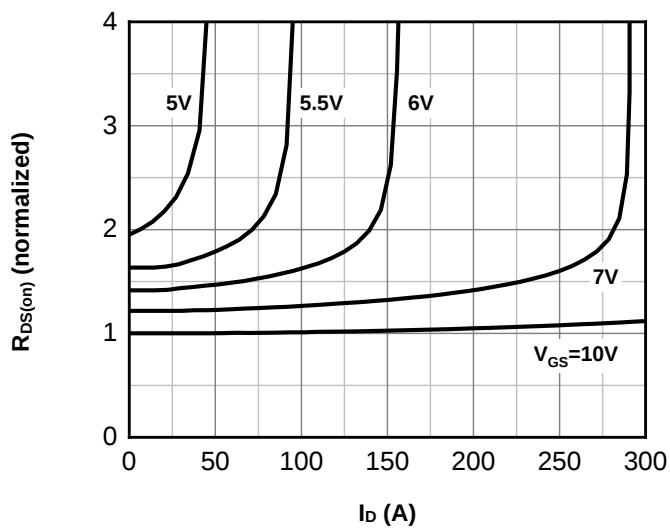


Fig.4 Typ. on-resistance vs gate-source voltage

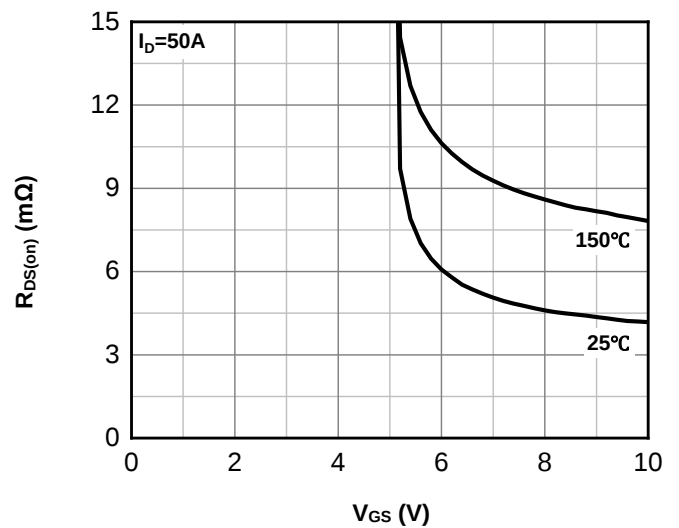


Fig.5 Normalized on-resistance vs junction temperature


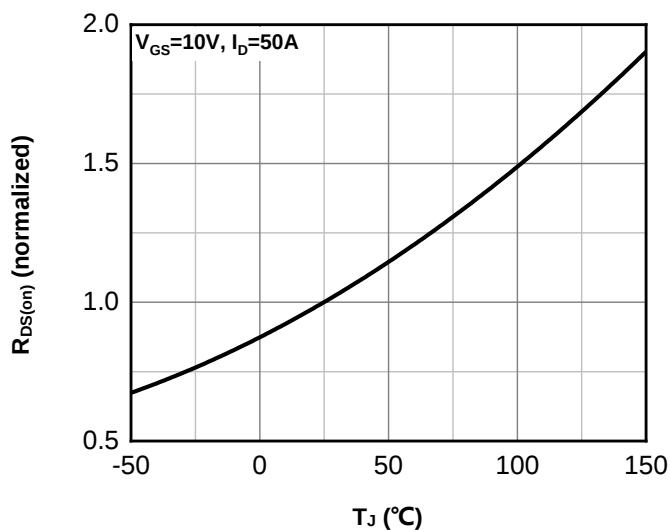
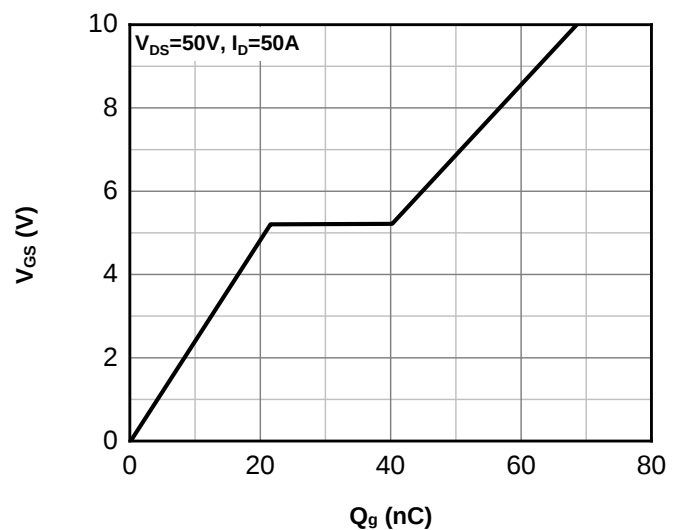
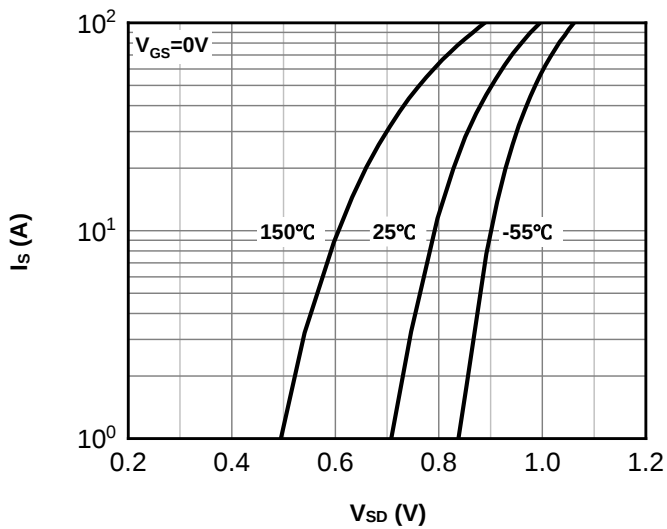
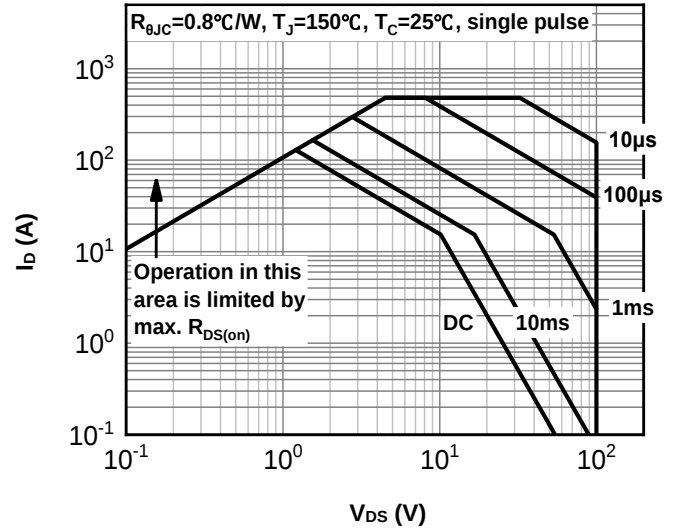
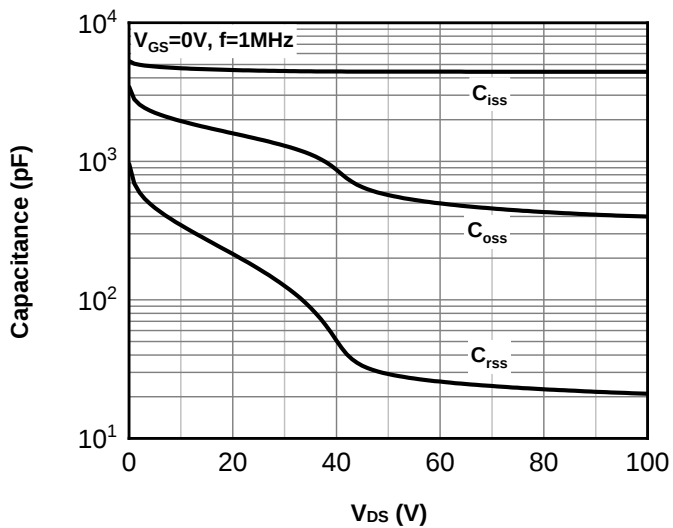
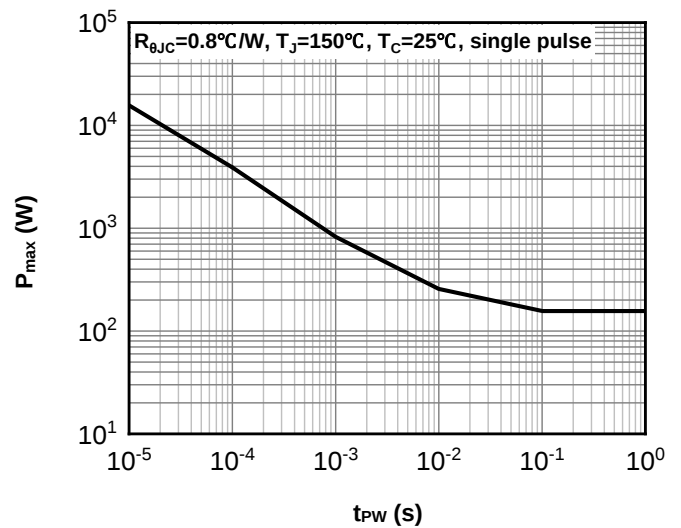
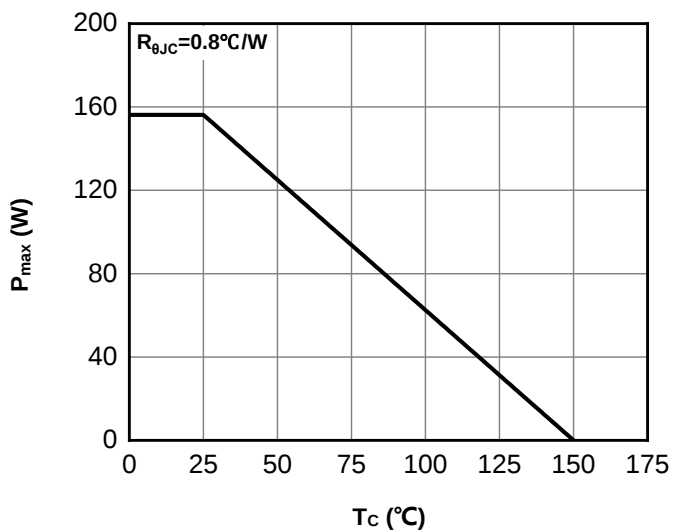





Fig.6 Typ. gate charge

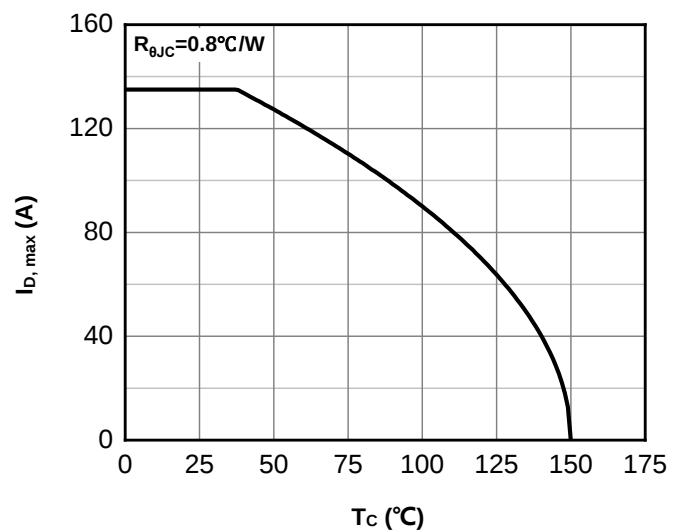

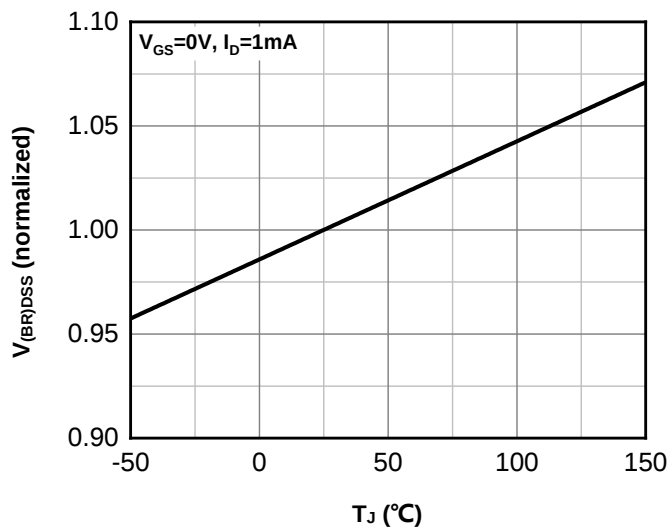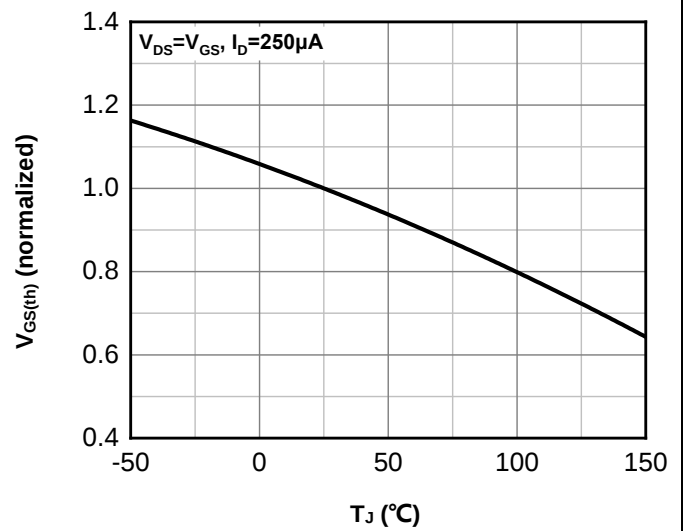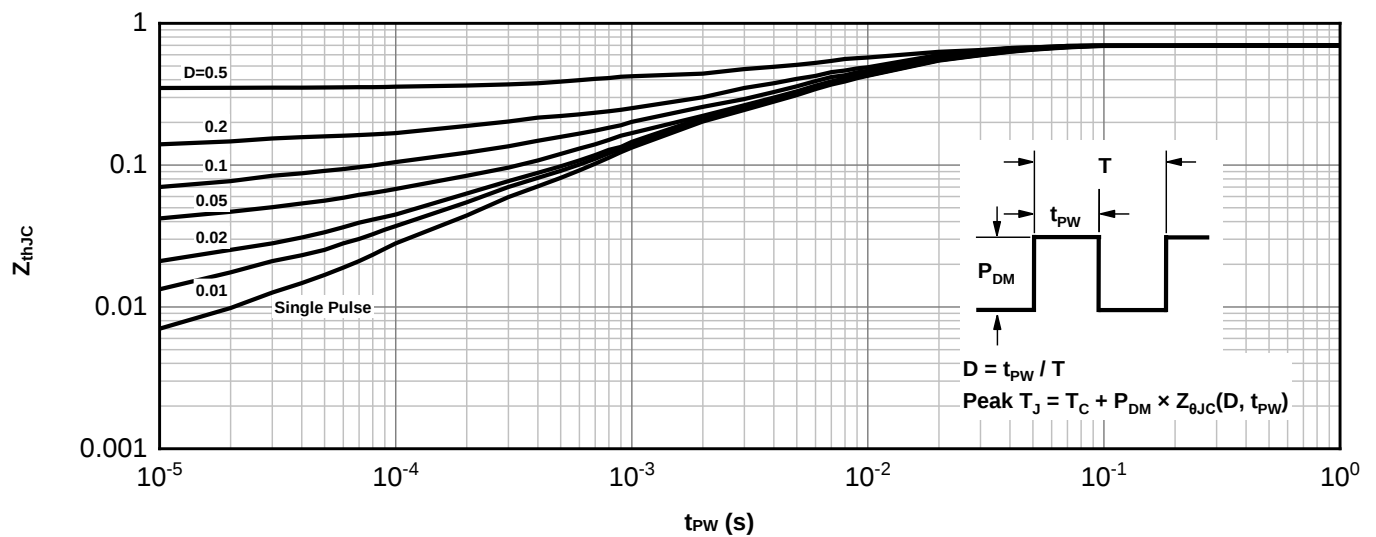Typical Performance Characteristics

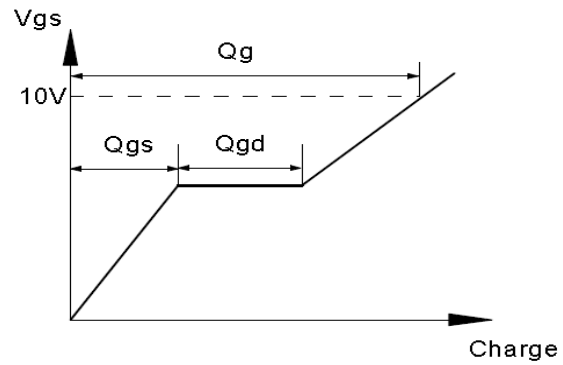
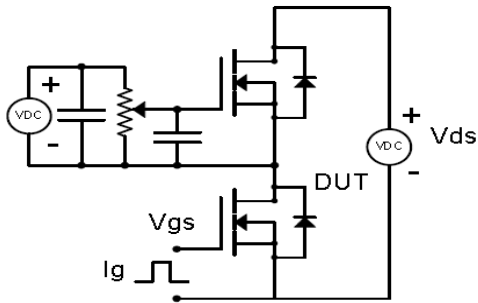
Fig.7 Typ. forward characteristics of body diode

Fig.8 Safe operating area

Fig.9 Typ. Capacitance

Fig.10 Single pulse maximum power dissipation

Fig.11 Max. power dissipation vs case temperature

Fig.12 Max. continuous drain current vs case temperature


Typical Performance Characteristics


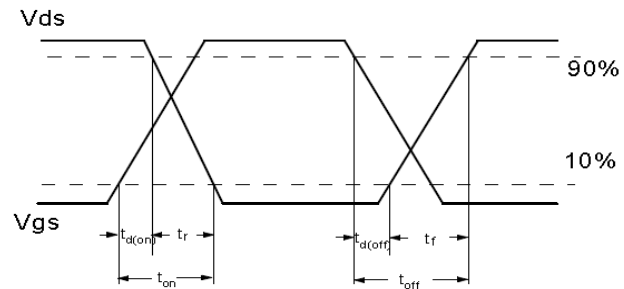
Fig.13 Normalized $V_{(BR)DSS}$ vs junction temperature

Fig.14 Normalized $V_{GS(th)}$ vs junction temperature

Fig.15 Transient thermal impedance from junction to case


Test Circuit & Waveform


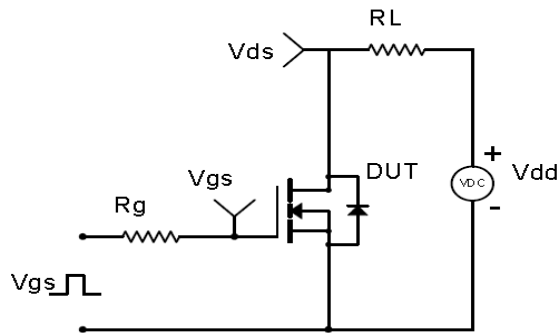
Gate Charge Test Circuit & Waveform





Resistive Switching Test Circuit & Waveforms



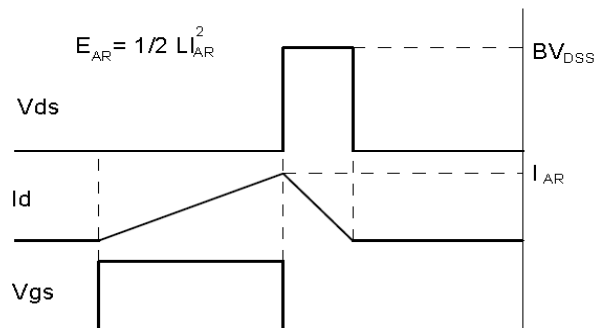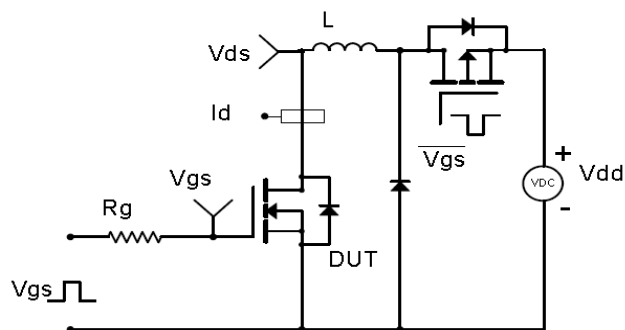
Unclamped Inductive Switching (UIS) Test Circuit & Waveforms



Diode Recovery Test Circuit & Waveforms

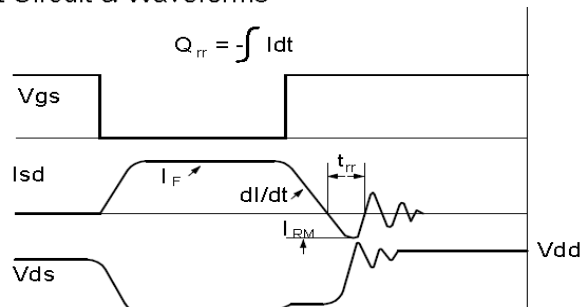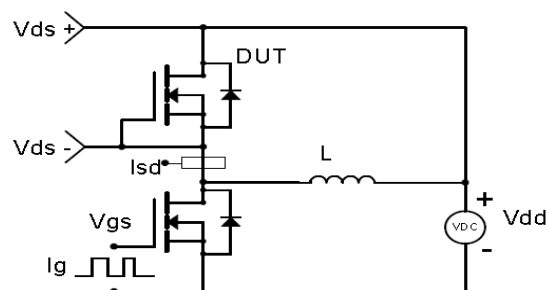

Outline Drawing TO-220

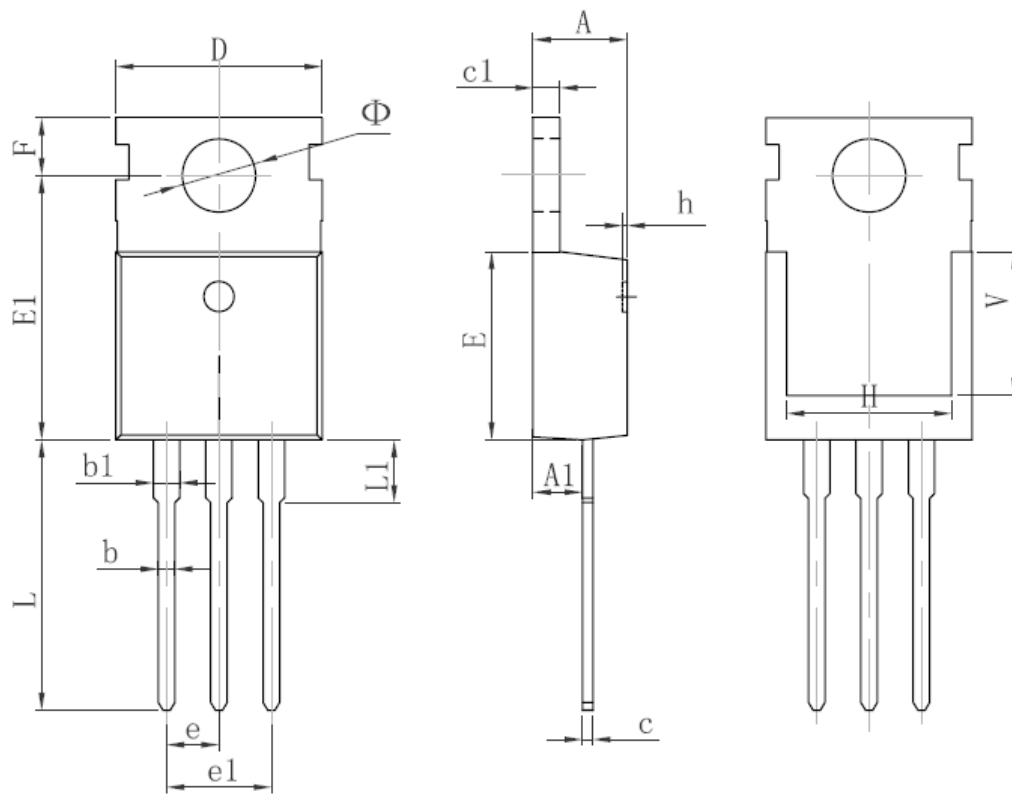

Symbol	Dimensions In Millimeters		
	Min.	NOM.	Max.
A	4.40	-	4.60
A1	2.25	-	2.55
b	0.71	-	0.91
b1	1.17	-	1.37
c	0.33	-	0.65
c1	1.20	-	1.40
D	9.91	-	10.25
E	8.95	-	9.75
E1	12.65	-	13.05
e	2.54 TYP-		
e1	4.98	-	5.18
F	2.65	-	2.95
H	7.90	-	8.10
h	0.00	-	0.30
L	12.90	-	13.40
L1	2.85	-	3.25
V	6.90 REF		
ϕ	3.40	-	3.80

Important Notice

The information given in this document shall be for illustrative purposes only and shall in no event be regarded as a guarantee of conditions or characteristics. Gostone reserves the right to change any information herein. With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Gostone or its affiliates hereby make no representation or warranty of any kind, expressed or implied, as to any information provided hereunder, including without limitation as to the accuracy, completeness or non-infringement of intellectual property rights of any third party, and they assume no liability for the consequences of use of such information. In addition, any information given in this document is subject to customer's compliance with its obligations stated herein and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Gostone in customer's applications. The information contained herein is exclusively intended for technically trained staff. No license is granted by implication under any patent right, copyright, mask work right, or other intellectual property right. It is customer's sole responsibility to evaluate the suitability of the product for the intended application and the completeness of the product information given herein with respect to such application. In no event shall Gostone or its affiliates be liable to any party for any direct, indirect, special, punitive, incidental or consequential damages of any nature whatsoever, including but not limited to loss of profits and loss of goodwill, whether or not such damages are based on tort or negligence, warranty, breach of contract or any other legal theory. In addition, any recipient of this document and the relevant products samples may not alter, decompile, disassemble, reverse engineer, or otherwise modify any information/samples received hereunder. Any intellectual property rights arising from the reverse engineering of Gostone's products shall belong to Gostone.