

Product Summary


V_{DS} (V)	$R_{DS(on),max}$ (mΩ)	I_D (A)
-30	60 @ $V_{GS} = -10V$	-4.0

Features


- ❖ Fast Switching
- ❖ Low On-Resistance
- ❖ Low Gate Charge

Application

- ❖ Load Switch
- ❖ Motor Control
- ❖ Power Management




SOT23-3L



PIN Configuration
(Top View)

Equivalent circuit



Absolute Maximum Rating ($T_A=25^\circ\text{C}$)

Parameter	Symbol	Limit	Unit
Drain-source voltage	V_{DS}	-30	V
Gate-source voltage	V_{GS}	± 20	
Continuous drain current ($V_{GS}=-4.5V$) ⁽¹⁾	I_D	-4.0	A
	I_D	-3.2	
Pulsed drain current ⁽²⁾	$I_{D,pulse}$	-16	
Power dissipation	P_D	1.1	W
	P_D	0.73	W
Operating junction and storage temperature range	T_J, T_{stg}	-55 to 150	$^\circ\text{C}$

Thermal Characteristic ($T_A=25^\circ\text{C}$)

Parameter	Symbol	Typ.	Max.	Unit
Thermal Resistance, Junction-to-Ambient ⁽³⁾	$R_{\theta JA}$	85	110	$^\circ\text{C/W}$

**Electrical characteristics (Ta=25°C ± 3°C)**

Parameter	Symbol	Test conditions	Min.	Typ.	Max.	Unit
Static parameter ⁽⁴⁾						
Drain to source breakdown voltage	V _{(BR)DSS}	V _{GS} = 0 V, I _D = -250 μA	-30			V
Gate-source threshold voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = -250 μA	-0.7	-1.1	-1.4	V
Gate-body leakage	I _{GSS}	V _{DS} = 0 V, V _{GS} = ±12 V			±100	nA
Zero gate voltage drain current	I _{DSS}	V _{DS} = -30 V, V _{GS} = 0 V			-1	μA
Drain-source on-resistance	R _{DS(on)}	V _{GS} = -10V, I _D = -4.0 A		55	60	mΩ
		V _{GS} = -4.5V, I _D = -4.0 A		64	75	mΩ
Forward transconductance ⁽⁵⁾	g _{fs}	V _{DS} = -5.0V, I _D = -4.0A		8.0		S
Gate resistance	R _g	V _{GS} = 0V, V _{DS} = 0V, f = 1MHz		20		Ω
Dynamic ⁽⁵⁾						
Total gate charge	Q _g	V _{DS} = -15V, I _D = -4.0A V _{GS} = -10V		12		nC
Gate-source charge	Q _{gs}			1.5		
Gate-drain charge	Q _{gd}			1.5		
Turn-on delay time	t _{d(on)}	V _{GS} = -10V, V _{DS} = -15V I _D = -4.0A, R _{GEN} = 3.0Ω		9.5		ns
Rise time	t _r			36		
Turn-off delay time	t _{d(off)}			3.0		
Fall time	t _f			5.2		
Input capacitance	C _{iss}	V _{DS} = -15 V, V _{GS} = 0 V, f = 1 MHz		650		pF
Output capacitance	C _{oss}			105		
Reverse transfer capacitance	C _{rss}			68		
Reverse Diode Characteristics ⁽⁵⁾						
Diode forward voltage	V _{SD}	I _S = -2.0A, V _{GS} = 0V		-0.8	-1.2	V
Diode Forward Current	I _s	T _A = 25°C			-4.0	A

Notes

1. This current is chip limited, which is calculated based on R_{thjc} .
2. This current is calculated on single pulse with 10μs Pulse & Duty Cycle = 1%.
3. Device mounted on FR-4 substrate PC board with 2oz copper in 1inch square cooling area.
4. Short duration pulse test used to minimize self-heating effect.
5. Defined by design, not subject to production.

Electrical characteristics diagrams

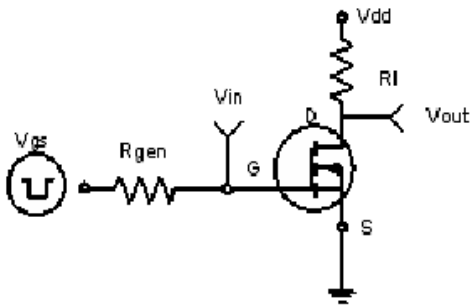


Figure 1: Switching Test Circuit

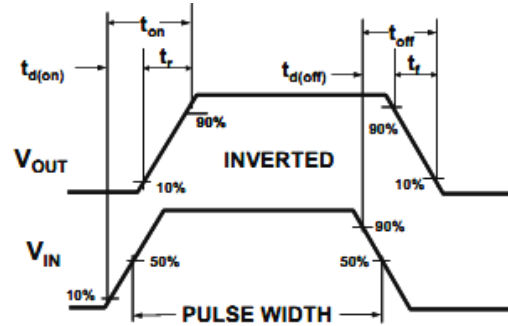


Figure 2: Switching Waveforms

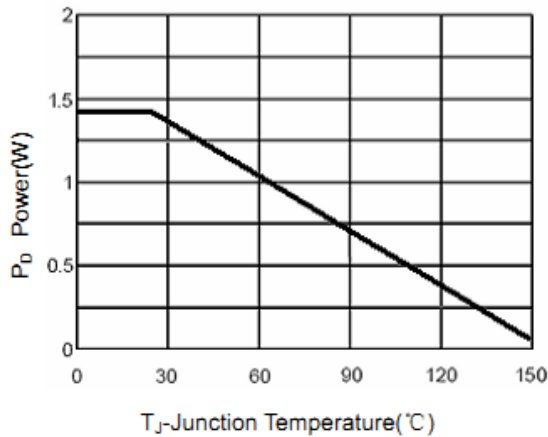


Figure 3 Power Dissipation

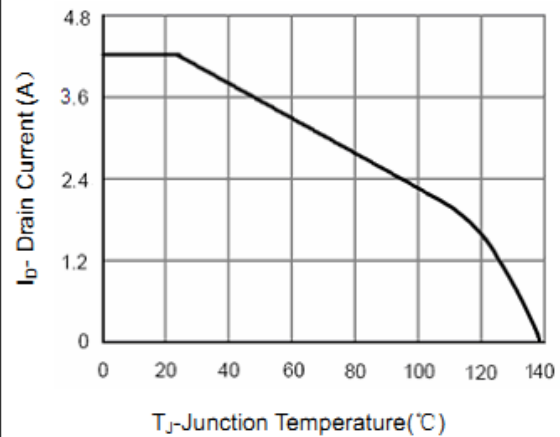


Figure 4 Drain Current

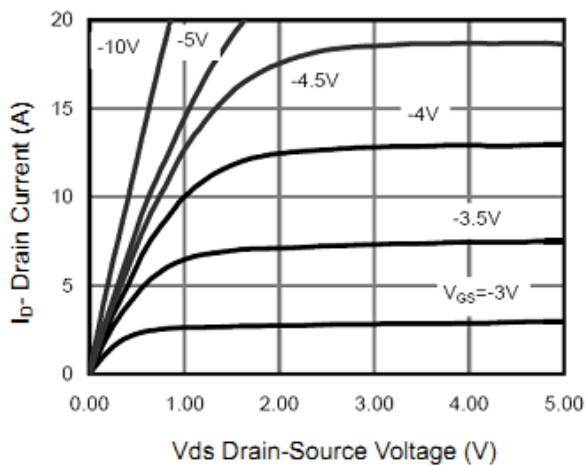


Figure 5 Output Characteristics







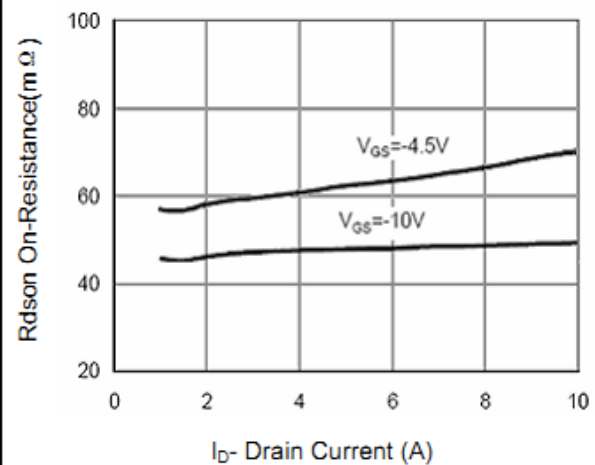


Figure 6 Drain-Source On-Resistance

Electrical characteristics diagrams

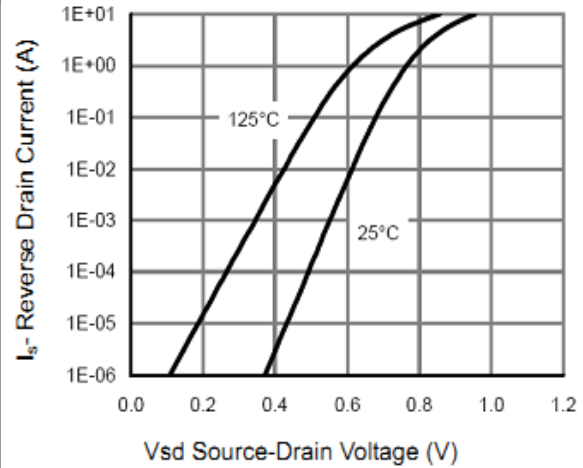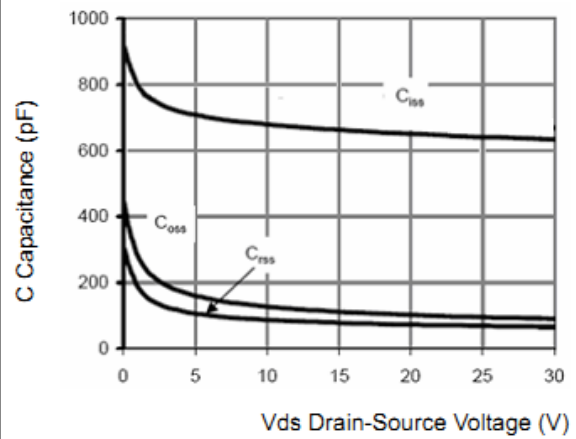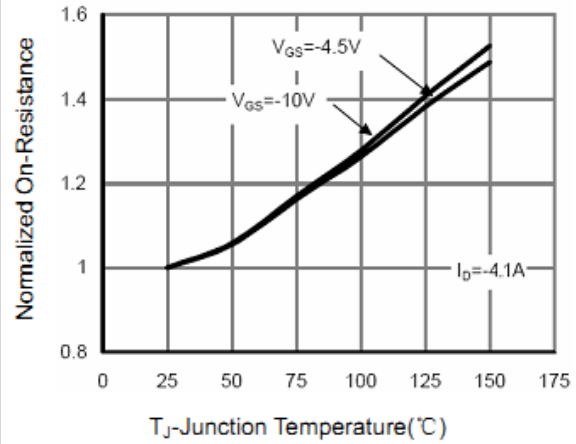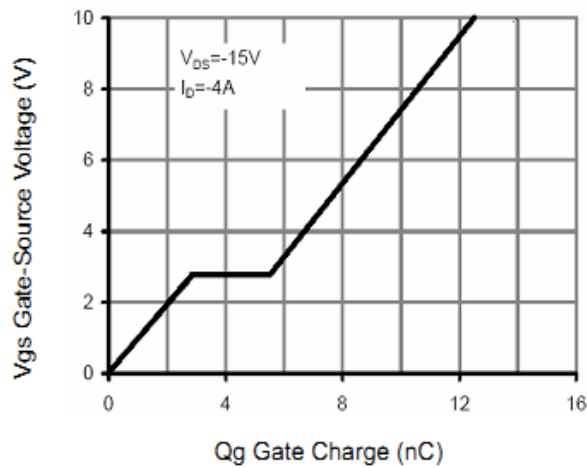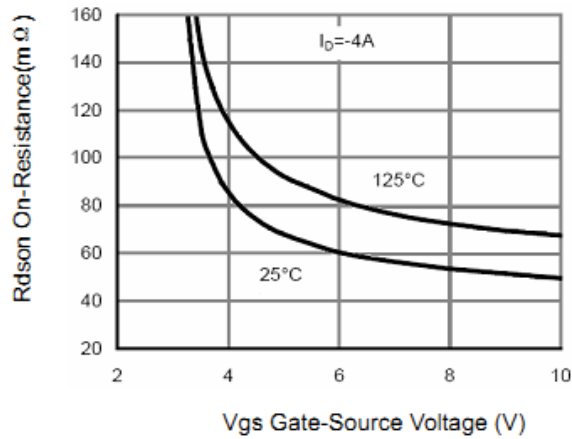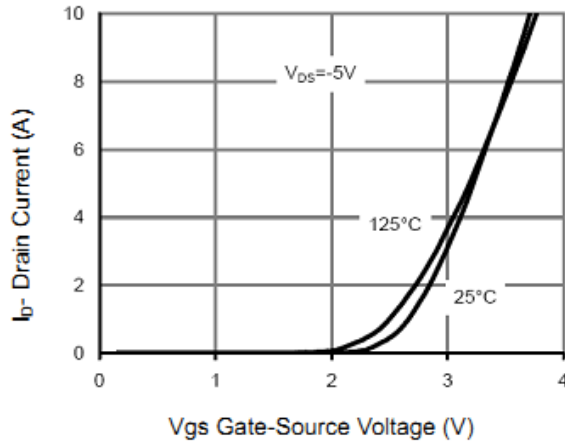

Electrical characteristics diagrams

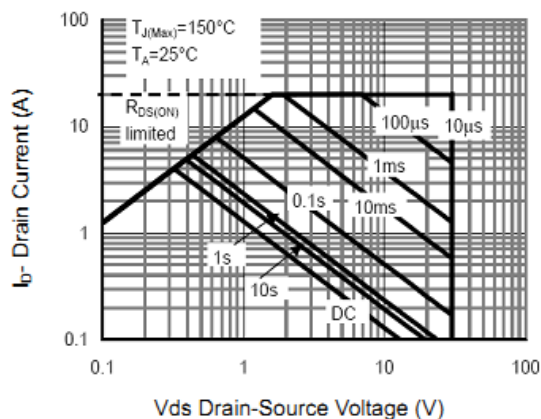


Figure 13 Safe Operation Area


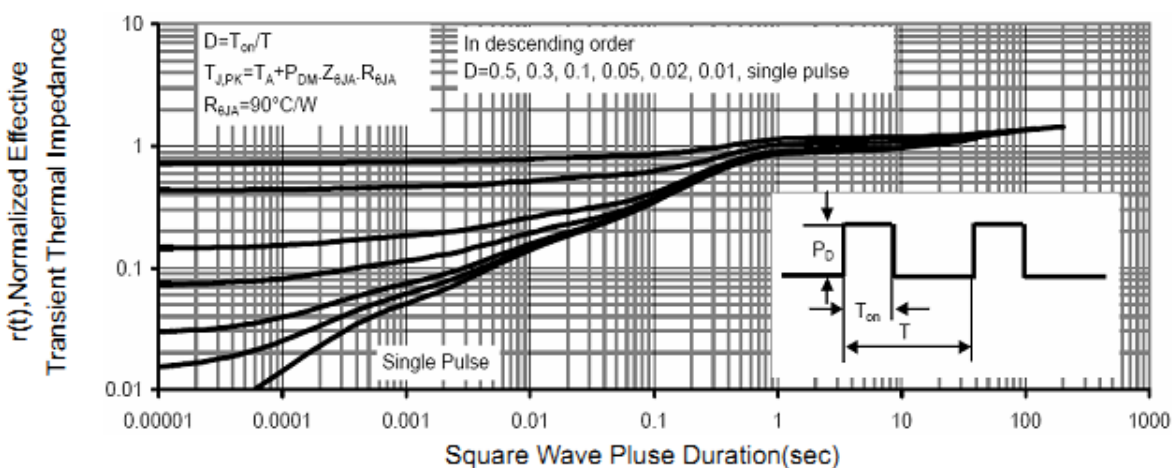


Figure 14 Normalized Maximum Transient Thermal Impedance

Package outline dimensions SOT23-3L

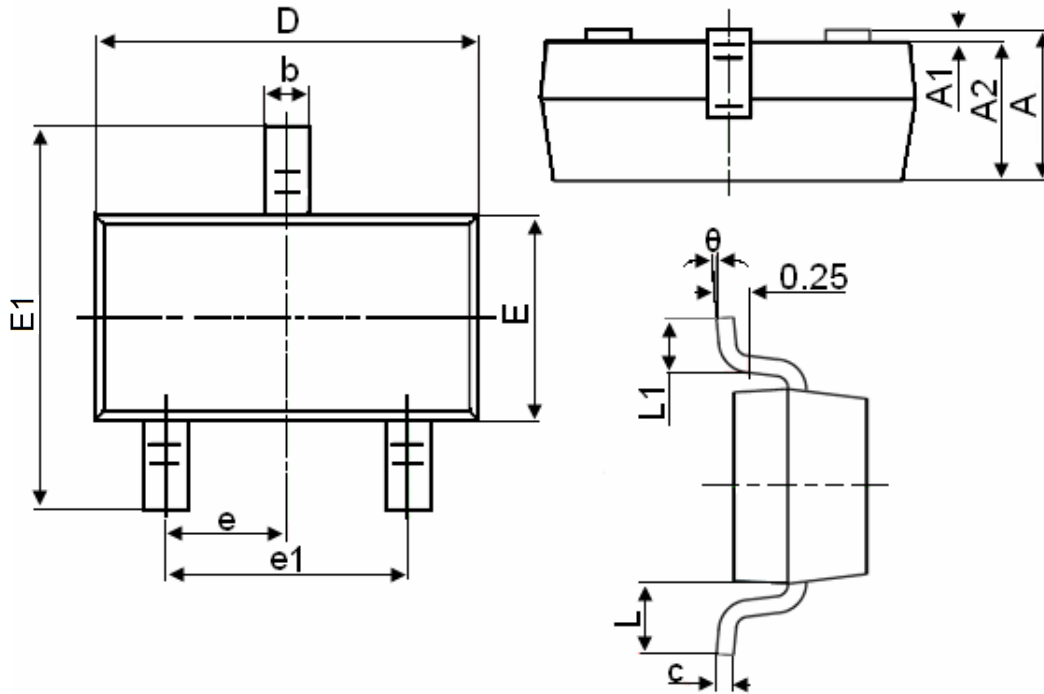

Symbol	Dimensions in Millimeters	
	MIN.	MAX.
A	0.90	1.150
A1	0.0	0.100
A2	0.9	1.050
b	0.30	0.500
c	0.08	0.150
D	2.80	3.000
E	1.50	1.700
E1	2.65	2.950
e	0.950 TYP	
e1	1.8	2.000
L	0.55 REF	
L1	0.3	0.500
θ	0°	8°

Notes

1. All dimensions are in millimeters.
2. Tolerance $\pm 0.10\text{mm}$ (4 mil) unless otherwise specified
3. Package body sizes exclude mold flash and gate burrs. Mold flash at the non-lead sides should be less than 5 mils.
4. Dimension L is measured in gauge plane.
5. Controlling dimension is millimeter, converted inch dimensions are not necessarily exact.

Important Notice

The information given in this document shall be for illustrative purposes only and shall in no event be regarded as a guarantee of conditions or characteristics. Gostone reserves the right to change any information herein. With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Gostone or its affiliates hereby make no representation or warranty of any kind, expressed or implied, as to any information provided hereunder, including without limitation as to the accuracy, completeness or non-infringement of intellectual property rights of any third party, and they assume no liability for the consequences of use of such information. In addition, any information given in this document is subject to customer's compliance with its obligations stated herein and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Gostone in customer's applications. The information contained herein is exclusively intended for technically trained staff. No license is granted by implication under any patent right, copyright, mask work right, or other intellectual property right. It is customer's sole responsibility to evaluate the suitability of the product for the intended application and the completeness of the product information given herein with respect to such application. In no event shall Gostone or its affiliates be liable to any party for any direct, indirect, special, punitive, incidental or consequential damages of any nature whatsoever, including but not limited to loss of profits and loss of goodwill, whether or not such damages are based on tort or negligence, warranty, breach of contract or any other legal theory. In addition, any recipient of this document and the relevant products samples may not alter, decompile, disassemble, reverse engineer, or otherwise modify any information/samples received hereunder. Any intellectual property rights arising from the reverse engineering of Gostone's products shall belong to Gostone.