

N-channel Power MOSFET:
30V, 3.8mohm, 49A, PDFN3333

Product Summary

VDS	VGSS	RDS(ON) TYP/MAX	ID MAX
30V	± 20V	3.8/5.2mΩ@VGS=10V 6.1/10.2 mΩ@VGS=4.5V	49A

Marking Symbol Code

- ❖ Laser Marking Device Code: AVM



GS : Gostone (fixed)
AVM: Marking Device Code (fixed)
A: Factory Code
Y: Year Code
WW: Week Code
LT: LOT Code
o : Pin#1 Identifier

Form

- ❖ Tape & Reel Embossed Type: 5,000pcs / reel


Features

- ❖ Low RDSon
- ❖ Low Gate Charge
- ❖ High Current Capacity
- ❖ Halogen-Free / RoHS Compliant

Application

- ❖ Battery Charging & Discharging for NB Battery Pack
- ❖ DC/DC Converters in Computing.

Equivalent circuit



Absolute Maximum Rating Ta=25°C

Parameter	Symbol	Rating	Unit
Drain to Source Voltage	VDS	30	V
Gate to Source Voltage	VGS	±20	V
Continuous Drain Current	IDM	49	A
		30	A
Pulsed Drain Current*1	IDM	98	A
Continuous Drain Current	IDSM	14	A
		11	A
Avalanche Current	IAS	20.6	A
Avalanche Energy	EAS	21.2	mJ
Power Dissipation	PD	22.4	W
		8.9	W
Power Dissipation*3	PDSM	4.2	W
		2.7	W
Junction Temperature	Tj	150	°C
Storage Temperature	Tstg	-55 to +150	°C

*1Pulse width limited by maximum junction temperature.


*2The value of $R_{\theta JA}$ is measured with the device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with $T_A=25^\circ\text{C}$.

*3The Power dissipation is based on $R_{\theta JA}$ $t \leq 10\text{s}$ value.


Thermal Characteristics (Typical)

Parameter	Symbol	TYP	Unit
Junction-to Ambient (T _A =25°C)			
t ≤ 10s	R _{thJA} ·2	24.0	°C/W
Steady-State		57.0	°C/W
Junction-to Case (T _C =25°C)			
Steady-State	R _{thJC}	4.3	°C/W

Top View



Bottom View



1,2,3: Source
4: Gate
5,6,7,8: Drain

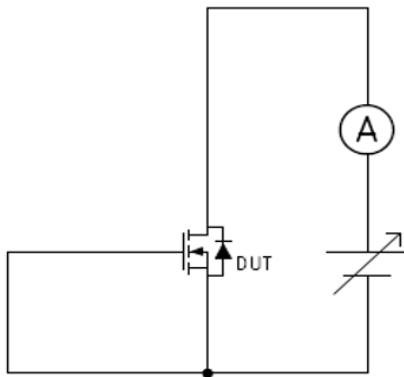
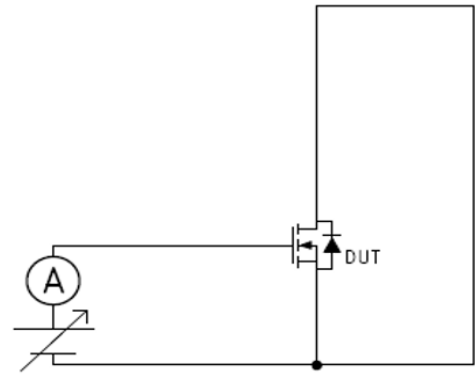
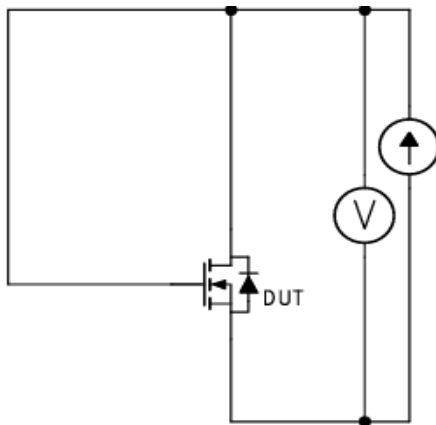
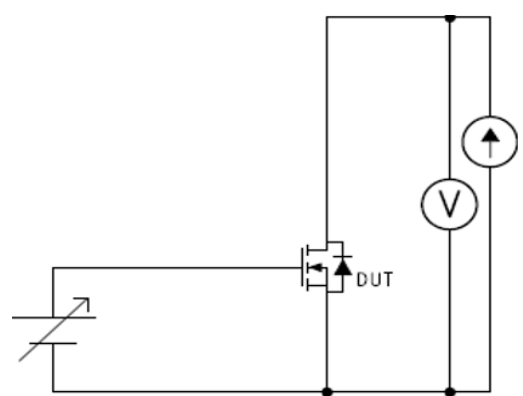
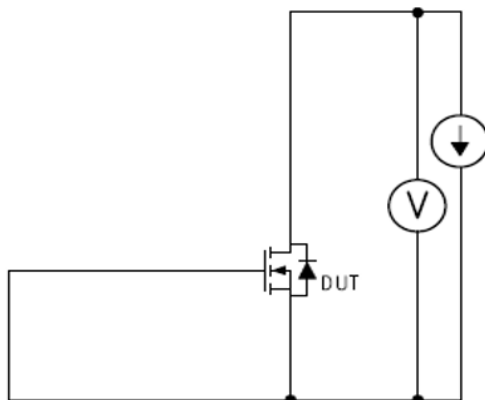
Electrical Characteristics (Tj=25degC)

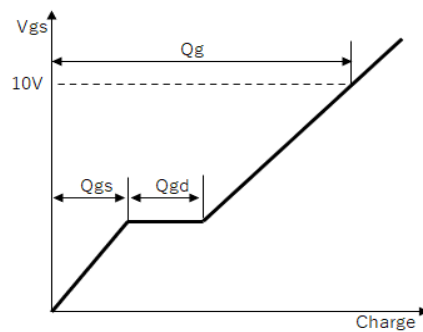
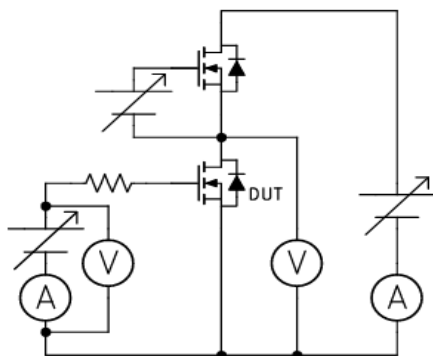
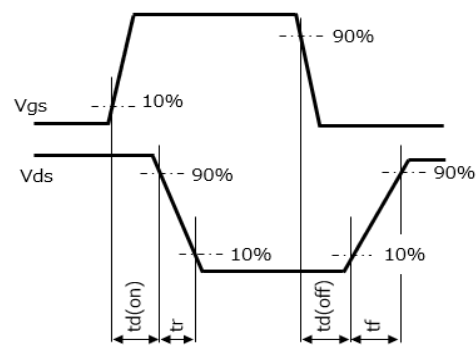
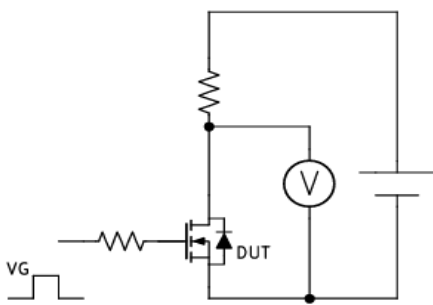
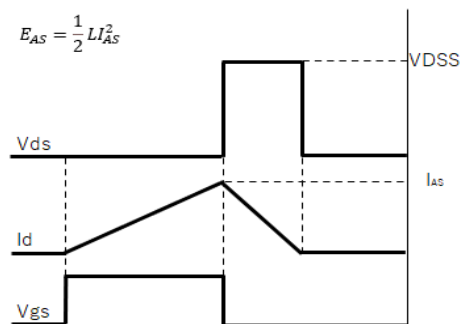
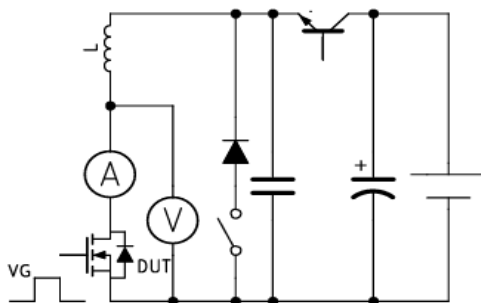
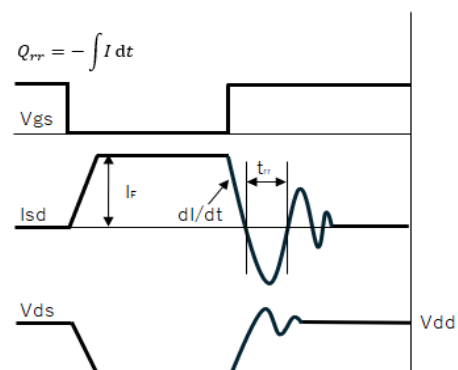
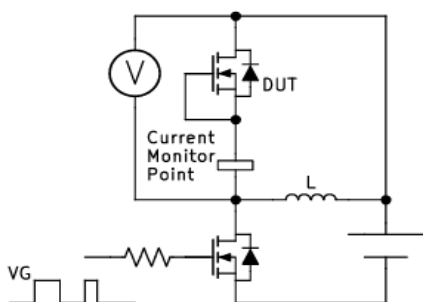
Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	VDSS	ID=250μA, VGS=0V	30			V
Zero Gate Voltage Drain Current	IDSS	VDS=24V, VGS=0V			1	μA
Gate-Source Leakage Current	IGSS	VGS=±20V, VDS=0V			±100	nA
Gate-Source Threshold Voltage	Vth	VDS=VGS, ID=250μA	1.2	1.7	2.4	V
Drain-Source On-State Resistance	RDS(on)1	ID=13A, VGS=10V		3.8	5.2	mΩ
	RDS(on)2	ID=13A, VGS=4.5V		6.1	10.2	
Forward Transconductance	gFS	VGS=5V, ID=13A		78		S
Input Capacitance *1	Ciss	VDS=15V, VGS=0V, f=1MHz		820		pF
Output Capacitance *1	Coss			607		
Reverse Transfer Capacitance *1	Crss			40		
Gate Resistance *1	Rg	f=1MHz		2.8		Ω
Turn-On Delay Time *1 *2	td(on)	VDD=15V, VGS=10V, ID=13A		7.2		ns
Rise Time *1 *2	tr			5.5		
Turn-Off Delay Time *1 *2	td(off)	VDD=15V, VGS=10V, ID=13A		25		ns
Fall Time *1 *2	tf			11		
Total Gate Charge *1	Qg	VDD=15V, VGS=10V, ID=13A		16.3		nC
Gate-Source Charge *1	Qgs			2.9		
Gate-Drain Charge *1	Qgd			4.2		
Diode Forward Voltage	VSD	IS=13A, VGS=0V			1.2	V
Maximum Body Diode Continuous Current	IS				23.2	A
Body Diode Reverse Recovery Time *1	trr	IF=13A, di/dt=100A/μs		23.8		ns
Body Diode Reverse Recovery Charge *1	Qrr			10.4		nC

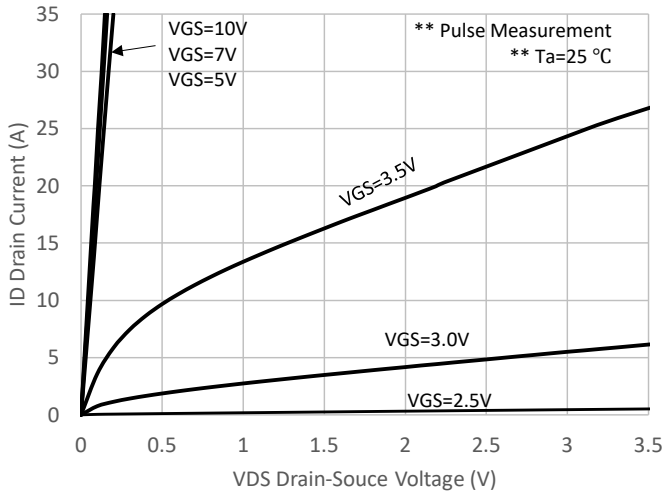
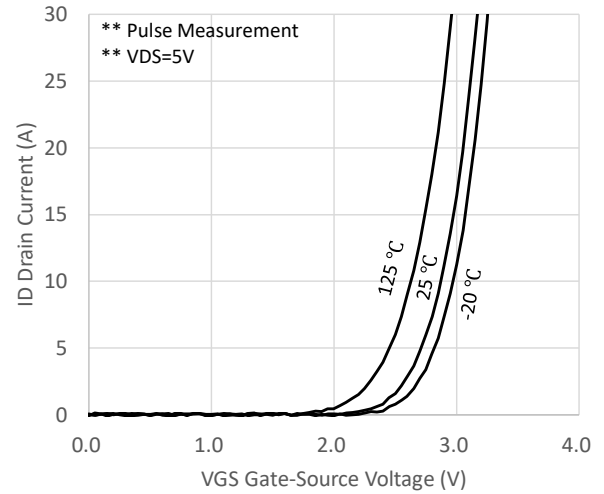
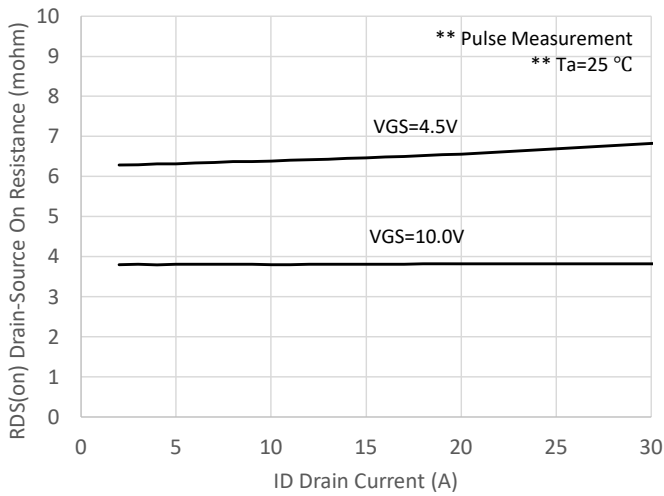
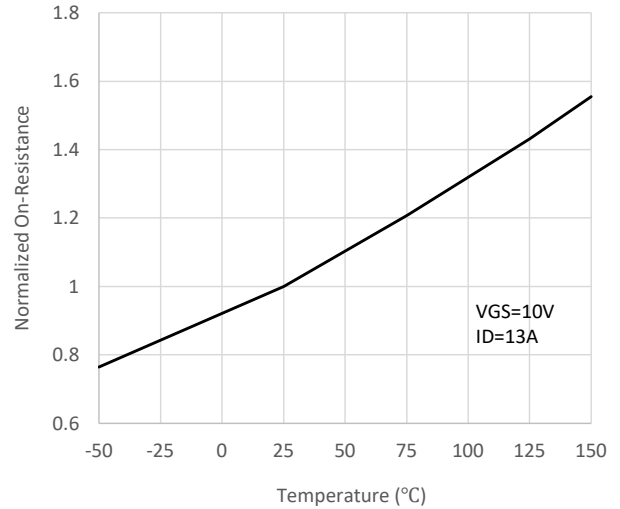
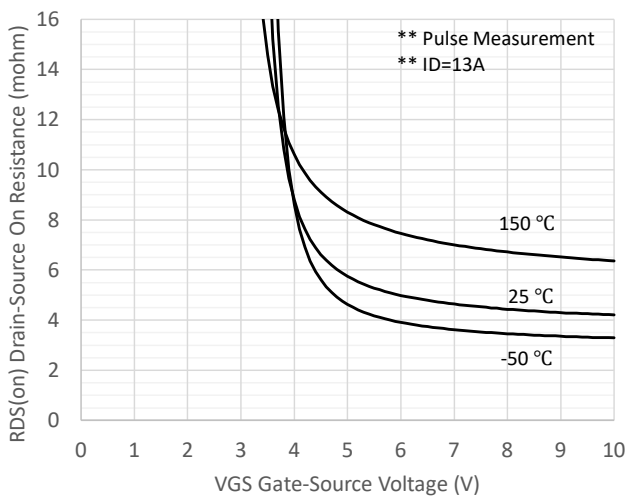
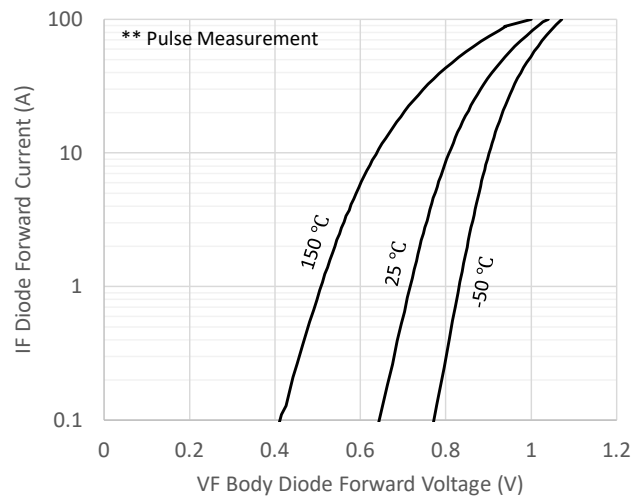
Note *1 Guaranteed by Design

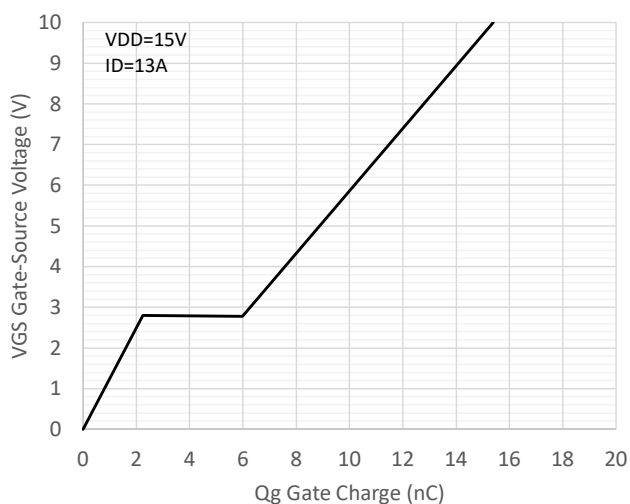
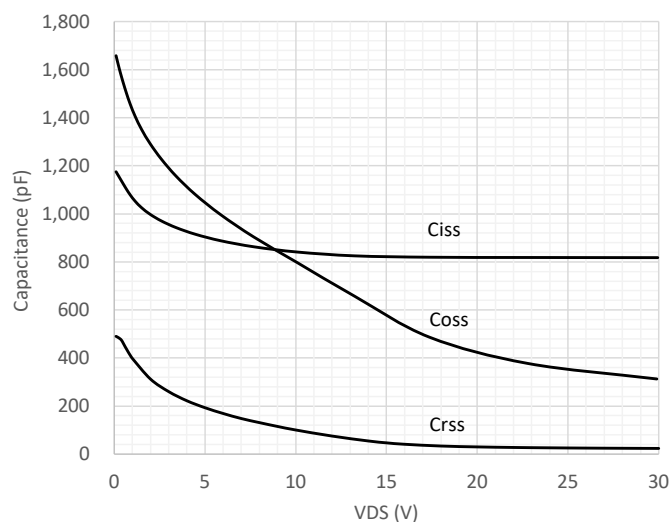
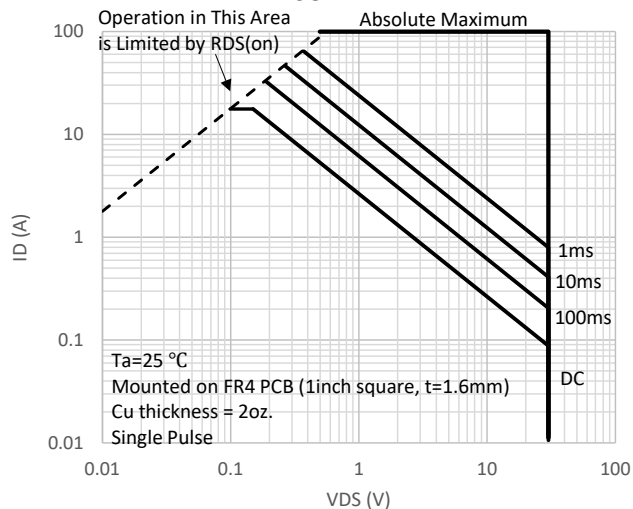
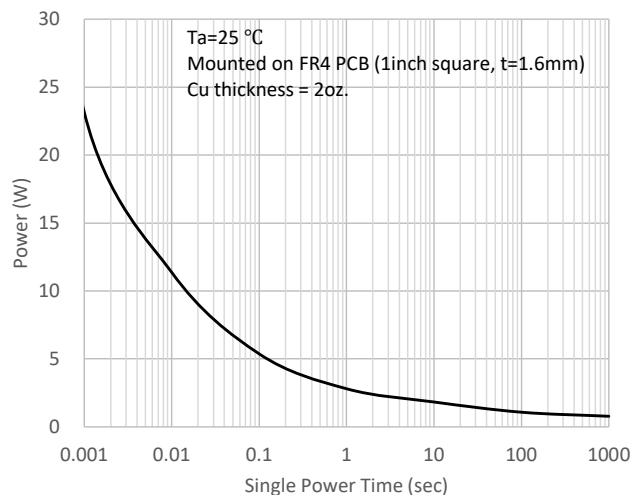
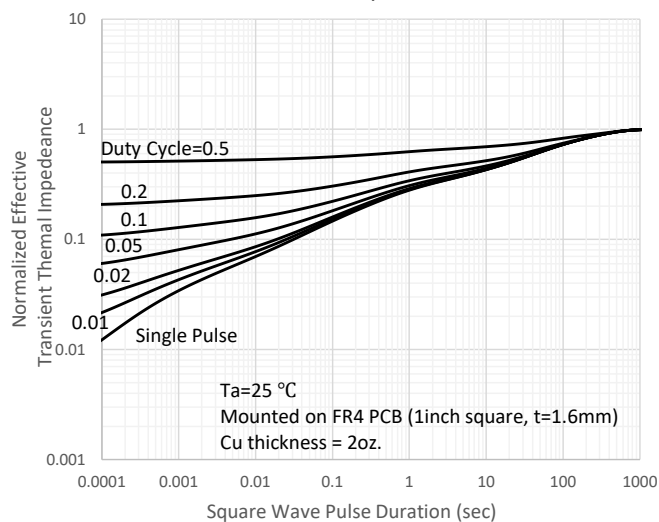
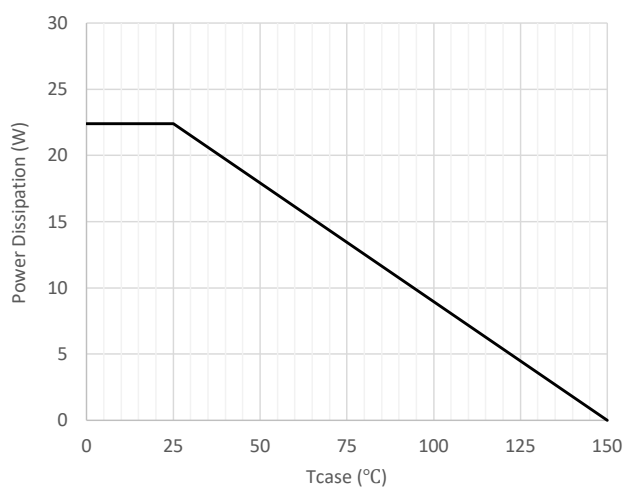
Note *2 Measurement Circuit for Switching Characteristics

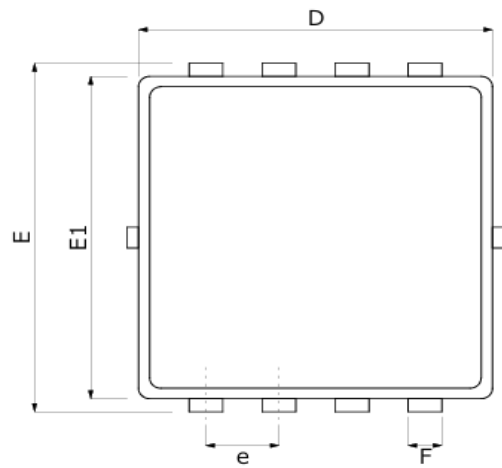
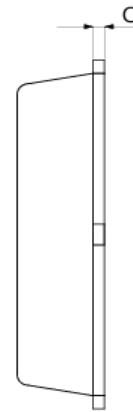
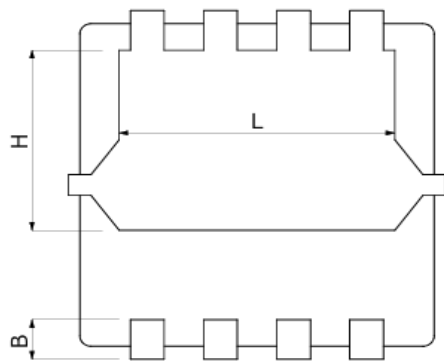
Test circuits

 Test Circuit 1
 V_{DS}/I_{DSS}

 Test Circuit 2
 I_{GSS}

 Test Circuit 3
 V_{th}

 Test Circuit 4
 $R_{DS(on)}$

 Test Circuit 5
 V_F


Test circuits
Test Circuit 6
Qg

Test Circuit 7
Switching Tin

Test Circuit 8
IAS

Test Circuit 9
trr/Qrr


Technical data
ID to VDS

ID to VGS

RDS(on) to ID

On-Resistance vs Junction Temperature

RDS(on) to VGS

IF to VF


Technical data
Gate-Charge Characteristics

Capacitance Characteristic

SOA

Single Pulse Maximum Power Dissipation

Thermal Response

Power Derating


Package Outline Dimensions
Top View

Side View

Bottom View


Symbol	Min	Typ	Max
A	0.725	0.775	0.825
B	0.28	0.38	0.48
C	0.13	0.15	0.20
D	3.05	3.15	3.25
D1			0.10
E	3.25	3.35	3.45
E1	3.0	3.1	3.2
e	0.60	0.65	0.70
F	0.25	0.30	0.35
H	1.48	1.58	1.68
L	2.35	2.45	2.55

- ❖ Tape & Reel Embossed Type: 5,000pcs / reel
- ❖ Factory PKG Code: PDFN
- ❖ Tape Width: 12mm, Pitch: 8mm, Reel Size: 12inch

The diagram illustrates a tape assembly with the following components and labels:

- Tape end**: Located at the left edge of the assembly.
- COMPONENTS TAPE (ORIENTATION IN POCKET)**: The central section of the tape, showing a series of circular holes and square pockets. A diagonal line indicates a break in the tape.
- Leader part**: Located at the right edge of the assembly.
- TRAILER TAPE (300mm MIN.)**: The section of the tape to the left of the components tape.
- LEADER TAPE (500mm MIN.)**: The section of the tape to the right of the components tape.
- Feeding Direction**: Indicated by a large arrow pointing to the right at the bottom of the diagram.

Important Notice

The information given in this document shall be for illustrative purposes only and shall in no event be regarded as a guarantee of conditions or characteristics. Gostone reserves the right to change any information herein. With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Gostone or its affiliates hereby make no representation or warranty of any kind, expressed or implied, as to any information provided hereunder, including without limitation as to the accuracy, completeness or non-infringement of intellectual property rights of any third party, and they assume no liability for the consequences of use of such information. In addition, any information given in this document is subject to customer's compliance with its obligations stated herein and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Gostone in customer's applications. The information contained herein is exclusively intended for technically trained staff. No license is granted by implication under any patent right, copyright, mask work right, or other intellectual property right. It is customer's sole responsibility to evaluate the suitability of the product for the intended application and the completeness of the product information given herein with respect to such application. In no event shall Gostone or its affiliates be liable to any party for any direct, indirect, special, punitive, incidental or consequential damages of any nature whatsoever, including but not limited to loss of profits and loss of goodwill, whether or not such damages are based on tort or negligence, warranty, breach of contract or any other legal theory. In addition, any recipient of this document and the relevant products samples may not alter, decompile, disassemble, reverse engineer, or otherwise modify any information/samples received hereunder. Any intellectual property rights arising from the reverse engineering of Gostone's products shall belong to Gostone.